

Ella Wheelchair Accessible Shower Base 60" x 36" Center Drain



MODEL#

ELB 6036 BF .875 C-WH

Outside Dimensions: 37" W x 60" L x 4 1/2" H.

Shipping Weight: 190 Crated.

Package Options:

- · 24" Grab Bar
- 36" Grab Bar
- · 42" Grab Bar
- · 24" Chrome Linear Grab Bar
- · 36" Chrome Linear Grab Bar
- 42" Chrome linear Grab Bar
- Seat-Padded 32" x 21" with Fold Down Legs
- · Slide Bar/Hand Held Shower
- Premium Anti-Bacterial Nylon Weighted Shower Curtain (Off-White)
- Curtain Rod-Stainless Steel
- Collapsible Dam with Horizontal Endcaps-White (for Barrier Free models)
- Collapsible Dam with Vertical Endcaps

Features:

- White Applied Acrylic
- · Self-Supporting & Pre-leveled Base
- Belveled Barrier Free Entry
- · No Recess Required
- Textured Slip-Resistant Floor
- Lifetime Warranty

Codes:









Code compliant when fully equipped and installed according to guidelines.





Manufactured in the United States of America


Accessories:

2" Chrome Strainer, Brass Drain with Friction Seal





Ella Wheelchair Accessible Shower Base 60" x 36" Center Drain

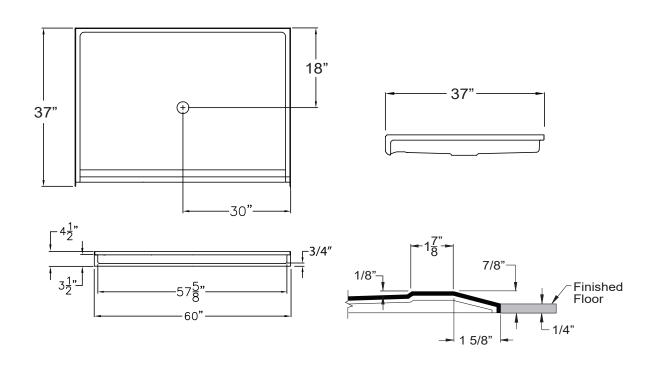

FEATURES: Dimensional Tolerence + 1/8" Dimensions needed for site preparation should be measured from the unit. Ellas Bubbles assumes no responsibility for prep work.

Model #	Material	Wall Finish	Pieces	Pkg.Wt. w/ Crating lbs.
ELB 6036 BF .875 C-WH	AcrylX ™	N/A	I	190

DIMENSIONS

Specifications	Inches
Width:	60
Depth:	37"
Height:	41/2


FRAMING DIMENSIONS

Туре	D Depth	W Width	H Height	Α	В	С
Alcove	37	60 ¹ ⁄ ₄	=	Box Out	30½	18

Discover more products and additional information at

ellasbubbles.com


Toll Free: 800-480-6850 Office Direct: 312-666-3552







Ella Wheelchair Accessible Shower Base 60" x 36" Center Drain

TOP VIEW








Ella Wheelchair Accessible Shower Base 60" x 36" Center Drain

The shower enclosure shall be 6036 BF .875 Pan Center Drain. Finished surface shall be of a sanitary-grade Applied Acrylic exhibiting a minimal thickness of 15 dry mils, and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of molded reinforced fiberglass with a minimum fiberglass content. The unit shall have outside dimmensions of 60" x 37" x 4 1/2". The Acrylic pan shall meet ANSI Z124.2, IPC, UPC, and comply with CSA.

The enclosure shall be equipped with the following installed accessories:

- 1) Low entry .875" Threshold.
- 2) Center Drain Location.
- 3) Integral self-sustaining bottom.

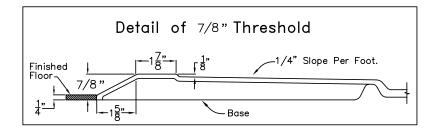

DUE TO THE NATURE OF THE MATERIALS INVOLVED UNIT DIMENSIONS MAY VARY +- 1/2" INCH.